



Test Report issued under the responsibility of:



| TEST REPORT IEC 62471 Photobiological safety of lamps and lamp systems | |
|--|---|
| Report Reference No. | EFSH23090258-IE-01-L01 |
| Date of issue | 2024-01-17 |
| Total number of pages | 20 pages |
| Name of Testing Laboratory preparing the Report | Eurofins Electrical Testing Service (Shanghai) Co., Ltd Building 18, No. 2168 Chenhang Highway, Minhang District, Shanghai, China |
| Applicant's name | TULED ELEKTRONİK SANAYİ TİCARET ANONİM ŞİRKETİ |
| Address | CIRGALAN MAH. 4140. CAD. NO:2 KOCASINAN / KAYSERİ- TURKIYE |
| Test specification: | |
| Standard | IEC 62471:2006 |
| Test procedure | Test report |
| Non-standard test method | N/A |
| Test Report Form No. | IEC62471B |
| TRF Originator | VDE Testing and Certification Institute |
| Master TRF | Dated 2018-08-16 |
| Copyright © 2018 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved. | |
| This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context. | |
| This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02. | |
| General disclaimer: | |
| The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Issuing CB Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report. | |

| | |
|------------------------------------|---|
| Test item description | LED bulb |
| Trade Mark | See 'Copy of marking plate' |
| Manufacturer | TULED ELEKTRONİK SANAYİ TİCARET ANONİM ŞİRKETİ Cırgalan Mah. 4140. Cad. NO:2 Kocasinan / KAYSERİ |
| Model/Type reference | BLRDA80S652142NN |
| Ratings | 110-240V~, 50-60Hz, 12W |

| IEC 62471 | | | |
|-----------|---|-----------------|----------|
| Clause | Requirement + Test | Result – Remark | Verdict |
| 4 | EXPOSURE LIMITS | | P |
| 4.1 | General | | P |
| | The exposure limits in this standard is not less than 0,01 ms and not more than any 8-hour period and should be used as guides in the control of exposure | | P |
| | Detailed spectral data of a light source are generally required only if the luminance of the source exceeds 10 ⁴ cd·m ⁻² | see clause 4.3 | P |
| 4.3 | Hazard exposure limits | | P |
| 4.3.1 | Actinic UV hazard exposure limit for the skin and eye | | P |
| | The exposure limit for effective radiant exposure is 30 J·m ⁻² within any 8-hour period | | P |
| | To protect against injury of the eye or skin from ultraviolet radiation exposure produced by a broadband source, the effective integrated spectral irradiance, E _s , of the light source shall not exceed the levels defined by: | | P |
| | $E_s \cdot t = \sum_{200}^{400} \sum_{\tau} E_{\lambda}(\lambda, t) \cdot S_{UV}(\lambda) \cdot \Delta t \cdot \Delta \lambda \leq 30 \quad \text{J} \cdot \text{m}^{-2}$ | | P |
| | The permissible time for exposure to ultraviolet radiation incident upon the unprotected eye or skin shall be computed by: | | P |
| | $t_{\max} = \frac{30}{E_s} \quad \text{s}$ | | P |
| 4.3.2 | Near-UV hazard exposure limit for eye | | P |
| | For the spectral region 315 nm to 400 nm (UV-A) the total radiant exposure to the eye shall not exceed 10000 J·m ⁻² for exposure times less than 1000 s. For exposure times greater than 1000 s (approximately 16 minutes) the UV-A irradiance for the unprotected eye, E _{UVA} , shall not exceed 10 W·m ⁻² . | | P |
| | The permissible time for exposure to ultraviolet radiation incident upon the unprotected eye for time less than 1000 s, shall be computed by: | | P |
| | $t_{\max} \leq \frac{10\,000}{E_{UVA}} \quad \text{s}$ | | P |
| 4.3.3 | Retinal blue light hazard exposure limit | | P |
| | To protect against retinal photochemical injury from chronic blue-light exposure, the integrated spectral radiance of the light source weighted against the blue-light hazard function, B(λ), i.e., the blue-light weighted radiance, L _B , shall not exceed the levels defined by: | | P |

| IEC 62471 | | | |
|-----------|--|---|---------|
| Clause | Requirement + Test | Result – Remark | Verdict |
| | $L_B \cdot t = \sum_{300}^{700} \sum_t L_\lambda(\lambda, t) \cdot B(\lambda) \cdot \Delta\lambda \leq 10^6 \quad \text{J} \cdot \text{m}^{-2} \cdot \text{sr}^{-1}$ | for $t \leq 10^4$ s $t_{\max} = \frac{10^6}{L_B}$ | N/A |
| | $L_B = \sum_{300}^{700} L_\lambda \cdot B(\lambda) \cdot \Delta\lambda \leq 100 \quad \text{W} \cdot \text{m}^{-2} \cdot \text{sr}^{-1}$ | for $t > 10^4$ s | P |
| 4.3.4 | Retinal blue light hazard exposure limit - small source | | N/A |
| | Thus the spectral irradiance at the eye E_λ , weighted against the blue-light hazard function $B(\lambda)$ shall not exceed the levels defined by: | see table 4.2 | N/A |
| | $E_B \cdot t = \sum_{300}^{700} \sum_t E_\lambda(\lambda, t) \cdot B(\lambda) \cdot \Delta\lambda \leq 100 \quad \text{J} \cdot \text{m}^{-2}$ | for $t \leq 100$ s | N/A |
| | $E_B = \sum_{300}^{700} E_\lambda \cdot B(\lambda) \cdot \Delta\lambda \leq 1 \quad \text{W} \cdot \text{m}^{-2}$ | for $t > 100$ s | N/A |
| 4.3.5 | Retinal thermal hazard exposure limit | | P |
| | To protect against retinal thermal injury, the integrated spectral radiance of the light source, L_λ , weighted by the burn hazard weighting function $R(\lambda)$ (from Figure 4.2 and Table 4.2), i.e., the burn hazard weighted radiance, shall not exceed the levels defined by: | | P |
| | $L_R = \sum_{380}^{1400} L_\lambda \cdot R(\lambda) \cdot \Delta\lambda \leq \frac{50\,000}{\alpha \cdot t^{0,25}} \quad \text{W} \cdot \text{m}^{-2} \cdot \text{sr}^{-1}$ | ($10 \mu\text{s} \leq t \leq 10$ s) | P |
| 4.3.6 | Retinal thermal hazard exposure limit – weak visual stimulus | | N/A |
| | For an infrared heat lamp or any near-infrared source where a weak visual stimulus is inadequate to activate the aversion response, the near infrared (780 nm to 1400 nm) radiance, L_{IR} , as viewed by the eye for exposure times greater than 10 s shall be limited to: | | N/A |
| | $L_{IR} = \sum_{780}^{1400} L_\lambda \cdot R(\lambda) \cdot \Delta\lambda \leq \frac{6\,000}{\alpha} \quad \text{W} \cdot \text{m}^{-2} \cdot \text{sr}^{-1}$ | $t > 10$ s | N/A |
| 4.3.7 | Infrared radiation hazard exposure limits for the eye | | P |
| | The avoid thermal injury of the cornea and possible delayed effects upon the lens of the eye (cataractogenesis), ocular exposure to infrared radiation, E_{IR} , over the wavelength range 780 nm to 3000 nm, for times less than 1000 s, shall not exceed: | | N/A |
| | $E_{IR} = \sum_{780}^{3000} E_\lambda \cdot \Delta\lambda \leq 18\,000 \cdot t^{-0,75} \quad \text{W} \cdot \text{m}^{-2}$ | $t \leq 1000$ s | N/A |
| | For times greater than 1000 s the limit becomes: | | P |
| | $E_{IR} = \sum_{780}^{3000} E_\lambda \cdot \Delta\lambda \leq 100 \quad \text{W} \cdot \text{m}^{-2}$ | $t > 1000$ s | P |

| IEC 62471 | | | |
|-----------|--|---------------------------------------|----------|
| Clause | Requirement + Test | Result – Remark | Verdict |
| 4.3.8 | Thermal hazard exposure limit for the skin | | P |
| | Visible and infrared radiant exposure (380 nm to 3000 nm) of the skin shall be limited to: | | P |
| | $E_H \cdot t = \sum_{380}^{3000} \sum_t E_\lambda(\lambda, t) \cdot \Delta t \cdot \Delta \lambda \leq 20\,000 \cdot t^{0,25} \quad \text{J} \cdot \text{m}^{-2}$ | | P |
| 5 | MEASUREMENT OF LAMPS AND LAMP SYSTEMS | | P |
| 5.1 | Measurement conditions | | P |
| | Measurement conditions shall be reported as part of the evaluation against the exposure limits and the assignment of risk classification. | | P |
| 5.1.1 | Lamp ageing (seasoning) | Aging time of the sample was 1 hours. | P |
| | Seasoning of lamps shall be done as stated in the appropriate IEC lamp standard. | | N/A |
| 5.1.2 | Test environment | | P |
| | For specific test conditions, see the appropriate IEC lamp standard or in absence of such standards, the appropriate national standards or manufacturer's recommendations. | Test condition: 240 V~ | P |
| 5.1.3 | Extraneous radiation | | P |
| | Careful checks should be made to ensure that extraneous sources of radiation and reflections do not add significantly to the measurement results. | | P |
| 5.1.4 | Lamp operation | | N/A |
| | Operation of the test lamp shall be provided in accordance with: | | N/A |
| | – the appropriate IEC lamp standard, or | | N/A |
| | – the manufacturer' s recommendation | | N/A |
| 5.1.5 | Lamp system operation | | P |
| | The power source for operation of the test lamp shall be provided in accordance with: | | P |
| | – the appropriate IEC standard, or | | N/A |
| | – the manufacturer' s recommendation | | P |
| 5.2 | Measurement procedure | | P |
| 5.2.1 | Irradiance measurements | | P |
| | Minimum aperture diameter 7mm. | | P |
| | Maximum aperture diameter 50 mm. | | P |
| | The measurement shall be made in that position of the beam giving the maximum reading. | | P |
| | The measurement instrument is adequate calibrated. | | P |
| 5.2.2 | Radiance measurements | | P |

| IEC 62471 | | | |
|-----------|---|-------------------------|----------|
| Clause | Requirement + Test | Result – Remark | Verdict |
| 5.2.2.1 | Standard method | | P |
| | The measurements made with an optical system. | | P |
| | The instrument shall be calibrated to read in absolute radiant power per unit receiving area and per unit solid angle to acceptance averaged over the field of view of the instrument. | | P |
| 5.2.2.2 | Alternative method | | N/A |
| | Alternatively to an imaging radiance set-up, an irradiance measurement set-up with a circular field stop placed at the source can be used to perform radiance measurements. | | N/A |
| 5.2.3 | Measurement of source size | | P |
| | The determination of α , the angle subtended by a source, requires the determination of the 50% emission points of the source. | | P |
| 5.2.4 | Pulse width measurement for pulsed sources | | N/A |
| | The determination of Δt , the nominal pulse duration of a source, requires the determination of the time during which the emission is > 50% of its peak value. | | N/A |
| 5.3 | Analysis methods | | P |
| 5.3.1 | Weighting curve interpolations | | P |
| | To standardize interpolated values, use linear interpolation on the log of given values to obtain intermediate points at the wavelength intervals desired. | see table 4.1 | P |
| 5.3.2 | Calculations | | P |
| | The calculation of source hazard values shall be performed by weighting the spectral scan by the appropriate function and calculating the total weighted energy. | | P |
| 5.3.3 | Measurement uncertainty | | P |
| | The quality of all measurement results must be quantified by an analysis of the uncertainty. | see Annex C in the norm | P |
| 6 | LAMP CLASSIFICATION | | P |
| | For the purposes of this standard it was decided that the values shall be reported as follows: | see table 6,1 | P |
| | – for lamps intended for general lighting service, the hazard values shall be reported as either irradiance or radiance values at a distance which produces an illuminance of 500 lux, but not at a distance less than 200 mm | 500 mm | P |
| | – for all other light sources, including pulsed lamp sources, the hazard values shall be reported at a distance of 200 mm | | N/A |
| 6.1 | Continuous wave lamps | | P |

| IEC 62471 | | | |
|-----------|--|-----------------|---------|
| Clause | Requirement + Test | Result – Remark | Verdict |
| 6.1.1 | Except Group | | P |
| | In the except group are lamps, which does not pose any photobiological hazard. The requirement is met by any lamp that does not pose: | | P |
| | – an actinic ultraviolet hazard (E_S) within 8-hours exposure (30000 s), nor | | P |
| | – a near-UV hazard (E_{UVA}) within 1000 s, (about 16 min), nor | | P |
| | – a retinal blue-light hazard (L_B) within 10000 s (about 2,8 h), nor | | P |
| | – a retinal thermal hazard (L_R) within 10 s, nor | | P |
| | – an infrared radiation hazard for the eye (E_{IR}) within 1000 s | | P |
| 6.1.2 | Risk Group 1 (Low-Risk) | | N/A |
| | In this group are lamps, which exceeds the limits for the except group but that does not pose: | | N/A |
| | – an actinic ultraviolet hazard (E_S) within 10000 s, nor | | N/A |
| | – a near ultraviolet hazard (E_{UVA}) within 300 s, nor | | N/A |
| | – a retinal blue-light hazard (L_B) within 100 s, nor | | N/A |
| | – a retinal thermal hazard (L_R) within 10 s, nor | | N/A |
| | – an infrared radiation hazard for the eye (E_{IR}) within 100 s | | N/A |
| | Lamps that emit infrared radiation without a strong visual stimulus and do not pose a near-infrared retinal hazard (L_{IR}), within 100 s are in Risk Group 1. | | N/A |
| 6.1.3 | Risk Group 2 (Moderate-Risk) | | N/A |
| | This requirement is met by any lamp that exceeds the limits for Risk Group 1, but that does not pose: | | N/A |
| | – an actinic ultraviolet hazard (E_S) within 1000 s exposure, nor | | N/A |
| | – a near ultraviolet hazard (E_{UVA}) within 100 s, nor | | N/A |
| | – a retinal blue-light hazard (L_B) within 0,25 s (aversion response), nor | | N/A |
| | – a retinal thermal hazard (L_R) within 0,25 s (aversion response), nor | | N/A |
| | – an infrared radiation hazard for the eye (E_{IR}) within 10 s | | N/A |
| | Lamps that emit infrared radiation without a strong visual stimulus and do not pose a near-infrared retinal hazard (L_{IR}), within 10 s are in Risk Group 2. | | N/A |
| 6.1.4 | Risk Group 3 (High-Risk) | | N/A |

| IEC 62471 | | | |
|-----------|--------------------|-----------------|---------|
| Clause | Requirement + Test | Result – Remark | Verdict |

| Table 4.1 | Spectral weighting function for assessing ultraviolet hazards for skin and eye | | | P |
|---|--|------------------------------|---|---|
| Wavelength ¹ λ , nm | UV hazard function $S_{uv}(\lambda)$ | Wavelength λ , nm | UV hazard function $S_{uv}(\lambda)$ | |
| 200 | 0,030 | 313* | 0,006 | |
| 205 | 0,051 | 315 | 0,003 | |
| 210 | 0,075 | 316 | 0,0024 | |
| 215 | 0,095 | 317 | 0,0020 | |
| 220 | 0,120 | 318 | 0,0016 | |
| 225 | 0,150 | 319 | 0,0012 | |
| 230 | 0,190 | 320 | 0,0010 | |
| 235 | 0,240 | 322 | 0,00067 | |
| 240 | 0,300 | 323 | 0,00054 | |
| 245 | 0,360 | 325 | 0,00050 | |
| 250 | 0,430 | 328 | 0,00044 | |
| 254* | 0,500 | 330 | 0,00041 | |
| 255 | 0,520 | 333* | 0,00037 | |
| 260 | 0,650 | 335 | 0,00034 | |
| 265 | 0,810 | 340 | 0,00028 | |
| 270 | 1,000 | 345 | 0,00024 | |
| 275 | 0,960 | 350 | 0,00020 | |
| 280* | 0,880 | 355 | 0,00016 | |
| 285 | 0,770 | 360 | 0,00013 | |
| 290 | 0,640 | 365* | 0,00011 | |
| 295 | 0,540 | 370 | 0,000093 | |
| 297* | 0,460 | 375 | 0,000077 | |
| 300 | 0,300 | 380 | 0,000064 | |
| 303* | 0,120 | 385 | 0,000053 | |
| 305 | 0,060 | 390 | 0,000044 | |
| 308 | 0,026 | 395 | 0,000036 | |
| 310 | 0,015 | 400 | 0,000030 | |

¹ Wavelengths chosen are representative: other values should be obtained by logarithmic interpolation at intermediate wavelengths.
* Emission lines of a mercury discharge spectrum.

| IEC 62471 | | | |
|-----------|--------------------|-----------------|---------|
| Clause | Requirement + Test | Result – Remark | Verdict |

| Table 4.2 | Spectral weighting functions for assessing retinal hazards from broadband optical sources | P |
|---------------|---|--------------------------------------|
| Wavelength nm | Blue-light hazard function B (λ) | Burn hazard function R (λ) |
| 300 | 0,01 | |
| 305 | 0,01 | |
| 310 | 0,01 | |
| 315 | 0,01 | |
| 320 | 0,01 | |
| 325 | 0,01 | |
| 330 | 0,01 | |
| 335 | 0,01 | |
| 340 | 0,01 | |
| 345 | 0,01 | |
| 350 | 0,01 | |
| 355 | 0,01 | |
| 360 | 0,01 | |
| 365 | 0,01 | |
| 370 | 0,01 | |
| 375 | 0,01 | |
| 380 | 0,01 | 0,1 |
| 385 | 0,013 | 0,13 |
| 390 | 0,025 | 0,25 |
| 395 | 0,05 | 0,5 |
| 400 | 0,10 | 1,0 |
| 405 | 0,20 | 2,0 |
| 410 | 0,40 | 4,0 |
| 415 | 0,80 | 8,0 |
| 420 | 0,90 | 9,0 |
| 425 | 0,95 | 9,5 |
| 430 | 0,98 | 9,8 |
| 435 | 1,00 | 10,0 |
| 440 | 1,00 | 10,0 |
| 445 | 0,97 | 9,7 |
| 450 | 0,94 | 9,4 |
| 455 | 0,90 | 9,0 |
| 460 | 0,80 | 8,0 |
| 465 | 0,70 | 7,0 |
| 470 | 0,62 | 6,2 |
| 475 | 0,55 | 5,5 |
| 480 | 0,45 | 4,5 |
| 485 | 0,40 | 4,0 |
| 490 | 0,22 | 2,2 |
| 495 | 0,16 | 1,6 |
| 500-600 | $10^{[(450-\lambda)/50]}$ | 1,0 |
| 600-700 | 0,001 | 1,0 |
| 700-1050 | | $10^{[(700-\lambda)/500]}$ |
| 1050-1150 | | 0,2 |
| 1150-1200 | | $0,2 \cdot 10^{0,02(1150-\lambda)}$ |
| 1200-1400 | | 0,02 |

| IEC 62471 | | | |
|-----------|--------------------|-----------------|---------|
| Clause | Requirement + Test | Result – Remark | Verdict |

| Table 5.4 Summary of the ELs for the surface of the skin or cornea (irradiance based values) | | | | | | P |
|--|---|---------------------|-----------------------|-----------------------------|---|---|
| Hazard Name | Relevant equation | Wavelength range nm | Exposure duration sec | Limiting aperture rad (deg) | EL in terms of constant irradiance $W \cdot m^{-2}$ | |
| Actinic UV skin & eye | $E_S = \sum E_\lambda \cdot S(\lambda) \cdot \Delta\lambda$ | 200 – 400 | < 30000 | 1,4 (80) | 30/t | |
| Eye UV-A | $E_{UVA} = \sum E_\lambda \cdot \Delta\lambda$ | 315 – 400 | ≤1000 >1000 | 1,4 (80) | 10000/t 10 | |
| Blue-light small source | $E_B = \sum E_\lambda \cdot B(\lambda) \cdot \Delta\lambda$ | 300 – 700 | ≤100 >100 | < 0,011 | 100/t 1,0 | |
| Eye IR | $E_{IR} = \sum E_\lambda \cdot \Delta\lambda$ | 780 – 3000 | ≤1000 >1000 | 1,4 (80) | 18000/t ^{0,75} 100 | |
| Skin thermal | $E_H = \sum E_\lambda \cdot \Delta\lambda$ | 380 – 3000 | < 10 | 2π sr | 20000/t ^{0,75} | |

| Table 5.5 Summary of the ELs for the retina (radiance based values) | | | | | | P |
|---|--|---------------------|---|--|---|---|
| Hazard Name | Relevant equation | Wavelength range nm | Exposure duration sec | Field of view radians | EL in terms of constant radiance $W \cdot m^{-2} \cdot sr^{-1}$ | |
| Blue light | $L_B = \sum L_\lambda \cdot B(\lambda) \cdot \Delta\lambda$ | 300 – 700 | 0,25 – 10 10-100 100-10000 ≥ 10000 | 0,011·√(t/10) 0,011 0,0011·√t 0,1 | 10 ⁶ /t 10 ⁶ /t 10 ⁶ /t 100 | |
| Retinal thermal | $L_R = \sum L_\lambda \cdot R(\lambda) \cdot \Delta\lambda$ | 380 – 1400 | < 0,25 0,25 – 10 | 0,0017 0,011·√(t/10) | 50000/(α·t ^{0,25}) 50000/(α·t ^{0,25}) | |
| Retinal thermal (weak visual stimulus) | $L_{IR} = \sum L_\lambda \cdot R(\lambda) \cdot \Delta\lambda$ | 780 – 1400 | > 10 | 0,011 | 6000/α | |

| EN 62471 | | | |
|----------|--------------------|-----------------|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |

| |
|---|
| ATTACHMENT TO TEST REPORT IEC 62471 EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES Photobiological safety of lamps and lamps systems |
| Differences according to..... EN 62471:2008 |
| Annex Form No..... EU_GD_IEC62471B |
| Annex Form Originator OVE |
| Master Annex Form..... 2019-01-24 |
| Copyright © 2019 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved. |

| | CENELEC COMMON MODIFICATIONS (EN) | P |
|----------|--|---|
| 4 | EXPOSURE LIMITS | P |
| | Contents of the whole Clause 4 of IEC 62471:2006 moved into a new informative Annex ZB | — |
| | Clause 4 replaced by the following: | P |
| | Limits of the Artificial Optical Radiation Directive (2006/25/EC) have been applied instead of those fixed in IEC 62471:2006 | P |
| 4.1 | General | P |
| | First paragraph deleted | — |

| EN 62471 | | | |
|----------|--------------------|-----------------|---------|
| Clause | Requirement + Test | Result – Remark | Verdict |


| Table 6.1 | Emission limits for risk groups of continuous wave lamps | | | | | | | | P |
|---|--|-----------|--------------------------------|---------------------------------|--------------------------------|----------------|--------|----------------|--------|
| Risk | Action spectrum | Symbol | Units | Emission Measurement | | | | | |
| | | | | Exempt | | Low risk | | Mod risk | |
| | | | | Limit | Result | Limit | Result | Limit | Result |
| Actinic UV | $S_{UV}(\lambda)$ | E_s | $W \cdot m^{-2}$ | 0,001 | 1,311E-05 | -- | -- | -- | -- |
| Near UV | | E_{UVA} | $W \cdot m^{-2}$ | 0,33 | 1,475E-03 | -- | -- | -- | -- |
| Blue light | $B(\lambda)$ | L_B | $W \cdot m^{-2} \cdot sr^{-1}$ | 100 | 3,066E+01 | 10000 | -- | 4000000 | -- |
| Blue light, small source | $B(\lambda)$ | E_B | $W \cdot m^{-2}$ | 0,01* | -- | 1,0 | -- | 400 | -- |
| Retinal thermal | $R(\lambda)$ | L_R | $W \cdot m^{-2} \cdot sr^{-1}$ | $28000/\alpha$ | 4,608E+02 | $28000/\alpha$ | -- | $71000/\alpha$ | -- |
| Retinal thermal, weak visual stimulus** | $R(\lambda)$ | L_{IR} | $W \cdot m^{-2} \cdot sr^{-1}$ | 545000 | -- | | | | |
| | | | | $0,0017 \leq \alpha \leq 0,011$ | | | | | |
| | | | | $6000/\alpha$ | $7,436E-02, \alpha=100,00mrad$ | | | | |
| | | | | $0,011 \leq \alpha \leq 0,1$ | | | | | |
| IR radiation, eye | | E_{IR} | $W \cdot m^{-2}$ | 100 | 1,173E-03 | 570 | -- | 3200 | -- |
| IR radiation, skin | | E_h | $W \cdot m^{-2}$ | 3556,56 | 1,420E+00 | -- | -- | -- | -- |
| * Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian. ** Involves evaluation of non-GLS source NOTE The action functions: see Table 4.1 and Table 4.2 The applicable aperture diameters: see 4.2.1 The limitations for the angular subtenses: see 4.2.2 The related measurement condition 5.2.3 and the range of acceptance angles: see Table 5.5. | | | | | | | | | |

| IEC TR 62778 | | | |
|--------------|---|--|------------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| 7 | MEASUREMENT INFORMATION FLOW | | P |
| 7.1 | Basic flow | | P |
| | 'Law of conservation of luminance' applied | | P |
| | Use of only true luminance/radiance values | | P |
| | In case of luminaire: The light source is operated in the luminaire under similar conditions as when tested as a component | | N/A |
| | In case Ethr value for RG2 was established the peak value was derived from angular light distribution | | N/A |
| 7.2 | Conditions for the radiance measurement | | P |
| | Standard condition applied (200mm distance, 0,011rad field of view) | | P |
| | Non-standard condition applied | | N/A |
| 7.3 | Special cases (I): Replacement by a lamp or LED module of another type | | N/A |
| | Light source is a white light source | | N/A |
| | Evaluation done based on highest luminance | | N/A |
| | Evaluation done based on CCT value | | N/A |
| 7.4 | Special cases (II): Arrays and clusters of primary light sources | | N/A |
| | LED package is evaluated as : | <input type="checkbox"/> RG0 unlimited <input type="checkbox"/> RG1 unlimited | N/A |
| | E _{thr} of LED package applies to array | | N/A |
| 8 | RISK GROUP CLASSIFICATION | | P |
| | Risk group achieved: | | P |
| | -...Risk Group 0 unlimited | | P |
| | -...Risk Group 1 unlimited | | N/A |
| | - E _{thr} (lx) : Distance to reach RG1..... (m) : | See below table | N/A |

| IEC TR 62778 | | | |
|--------------|--------------------|-----------------|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |

| TABLE: Spectroradiometric measurement | | | P | |
|---------------------------------------|---|--------------------------------------|-----------|--------|
| Measurement performed on: | <input type="checkbox"/> LED package <input type="checkbox"/> LED module <input checked="" type="checkbox"/> Lamp <input type="checkbox"/> Luminaire <input type="checkbox"/> LED | | | |
| Model number | BLRDA80S652142NN | | | |
| Test voltage (V) | 240 | | — | |
| Test current (mA) | 90 | | — | |
| Test frequency (Hz) | 50 | | — | |
| Ambient, t (°C) | 25 | | — | |
| Measurement distance | <input checked="" type="checkbox"/> 20 cm <input type="checkbox"/> | | — | |
| Source size | <input checked="" type="checkbox"/> Non-small <input type="checkbox"/> Small : mm | | — | |
| Field of view | <input type="checkbox"/> 100 mrad <input checked="" type="checkbox"/> 11 mrad <input type="checkbox"/> 1,7 mrad (for small sources) | | — | |
| Item | Symbol | Units | Result | Remark |
| Correlated colour temperature | CCT | K | / | |
| x/y colour coordinates | | | / | |
| Blue light hazard radiance | L _B | W/(m ² •sr ¹) | 4,262E+01 | RG 0 |
| Blue light hazard irradiance | E _B | W/m ² | / | |
| Luminance | L | cd/m ² | 5,855E+04 | |
| Illuminance | E | lx | / | |
| Risk group achieved: | | | | — |
| RG 0 | - ..Risk Group 0 unlimited | | | — |
| | - ..Risk Group 1 unlimited | | | — |
| | - E _{thr} (lx) : Distance to reach RG1 (m) : | | | — |
| Supplementary information: | | | | |

Sample photo

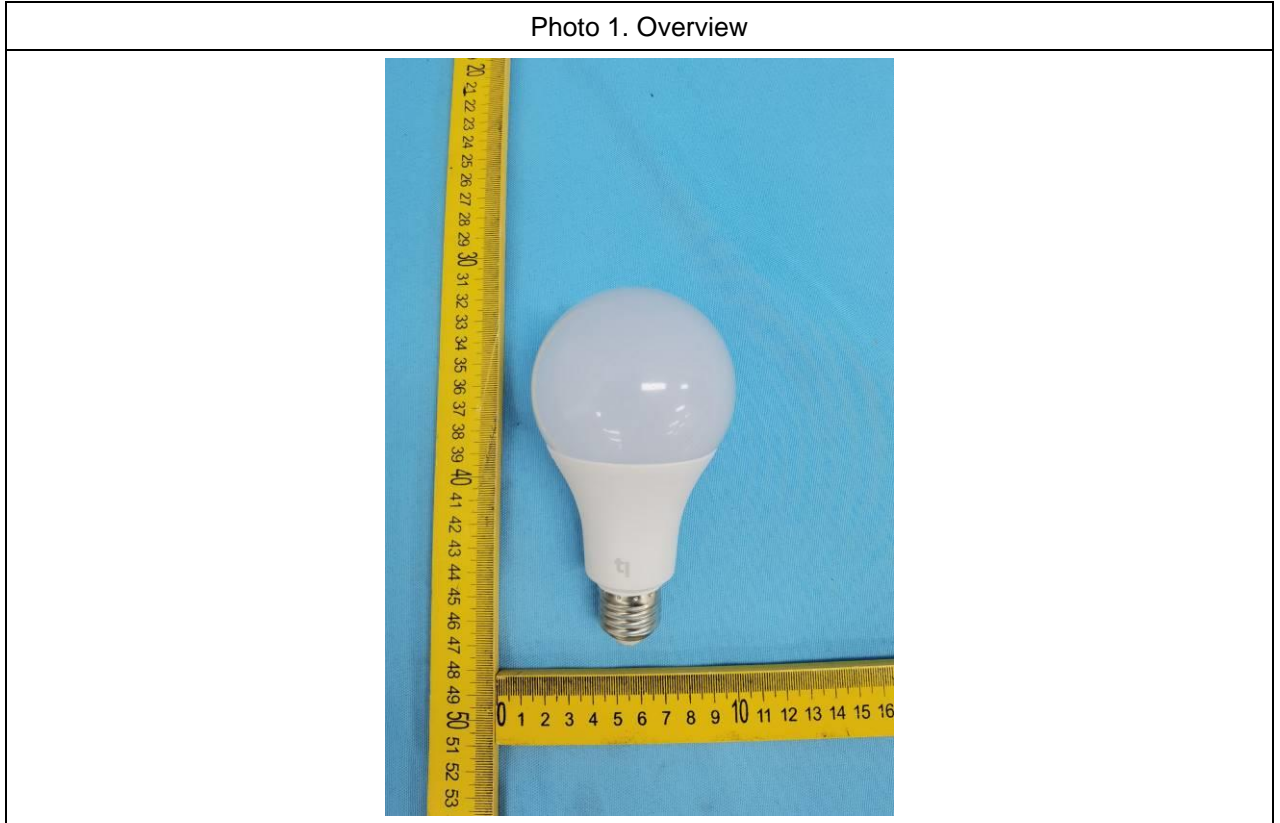

*****End of Report*****